PRODUCT SUPPORT MANUAL

SR-102™ // GMDSS 16/6 Survival Radio

Model No.: SR-102
Product No.: 2726A

Y1-03-0079-1 Rev. C

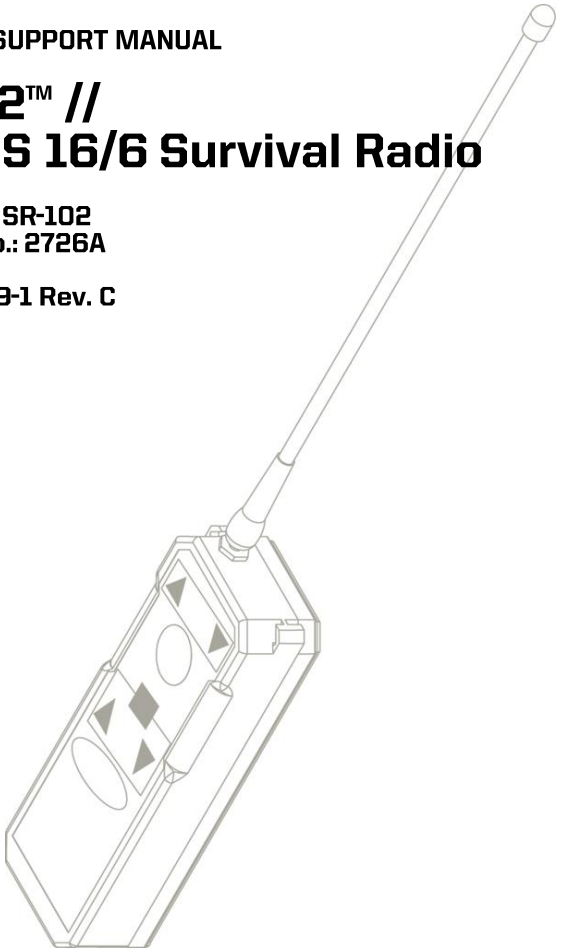

ACR Electronics, Inc. // 5757 Ravenswood Road // Fort Lauderdale // FL // 33312-6645
Tel: +1 (954) 981-3333 // Fax: +1 (954) 983-5087 // www.acrelectronics.com

About Cobham Life Support, ACR Products

Cobham Life Support, ACR Products, www.acrelectronics.com, designs and manufactures a complete line of safety and survival products including EPIRBs, PLBs, AIS, SARTs, Strobe Lights, Life Jacket Lights, Search Lights and safety accessories. The quality systems of this facility have been registered by UL to the ISO 9001:2000 Series Standards. Recognized as the world leader in safety and survival technologies, ACR has provided safety equipment to the aviation and marine industries as well as to the military since 1956.

About Cobham plc

Cobham plc is an international company engaged in the development, delivery and support of advanced aerospace and defence systems for land, sea, air and space, The company has four divisions that collectively specialize in the provision of components, subsystems and services that keep people safe, improve communications and enhance the capability of aerospace and defence platforms.

CAUTION: Before proceeding to install, test or use your new ACR Electronics' product, please read this Product Support Manual in its entirety.

If you have questions regarding the contents of the manual, please contact our Technical Service Department at ACR Electronics, Inc., Telephone +1 (954) 981- 3333. Please be ready to provide the technician with the page number you wish to discuss. If you have a question that is not covered in the manual, please visit our website and access the Frequently Asked Questions (FAQs) section for further information or call our Technical Service Department. The website address is www.acrelectronics.com. If in the future you lose this manual, you may access and print a replacement on the ACR website.

Call Sign: _____

Vessel: _____

Battery Expiration Date: _____

Table of Contents

SECTION 1 – INTRODUCTION _____ 3

SECTION 2 – PREPARING TO INSTALL _____ 4

SECTION 3 – INSTALLING THE SR-102™ SURVIVAL RADIO _____ 6

SECTION 4 – OPERATING THE SR-102™ SURVIVAL RADIO _____ 6

SECTION 5- SENDING DISTRESS COMMUNICATIONS _____ 8

SECTION 6 – MAINTAINING THE SR-102™ SURVIVAL RADIO _____ 10

APPENDIX A – BATTERIES AND CHARGERS _____ 13

APPENDIX B – TECHNICAL SPECIFICATIONS _____ 14

APPENDIX C – WARRANTY, USEFUL LIFE POLICY, NOTICES _____ 15

PLEASE READ ALL WARNINGS, CAUTIONS AND NOTES CAREFULLY

SECTION 1 – INTRODUCTION

OVERVIEW

This manual contains necessary information for the operation, maintenance and performance of distress communications utilizing the **ACR/2726A** 16/6 Survival Craft Portable Two-Way Radiotelephone. The user is strongly recommended to read this manual in its entirety. A photocopy of the suggested procedures for distress communications outlined in Section 5 should be kept with each radiotelephone to aid the designated operator and maximize the intelligibility and success of his radio distress request.

The 16/6 Survival Craft Portable Two-Way VHF Radiotelephone is intended to be used for on-scene emergency communications between survival craft and ship, and survival craft and rescue units. The radio is equipped with a 5 year lithium survival battery pack which is user replaceable. With the lithium battery pack installed, the unit meets all IMO, SOLAS and FCC requirements for survival craft two-way VHF transceivers. An optional rechargeable MaxCap™ battery pack is also available.

RADIO LICENSE REQUIREMENTS

This radio is FCC Type Accepted and GMDSS listed (FCC Part 80.1101) as a survival craft two-way VHF radiotelephone apparatus which complies with the 1988 GMDSS SOLAS amendments. To install the radio on a survival craft, the host ship must have a valid Ship Station License as required by law. To obtain an application for an FCC Ship Station License (U.S. ships), the user should contact the nearest FCC office.

In the USA, contact the Federal Communications Commission (FCC) at www.fcc.gov on the internet. You will need Form 605, “Quick-Form Application for Authorization in the Ship, Aircraft, Amateur, Restricted and Commercial Operator, and General Mobile Radio Services”, which may be downloaded or completed online. You may also call FCC’s Forms Distribution Center at 800-418-3676.

Please note that regulations for VHF radios may be different in different parts of the world. Always contact your local authority to determine the requirements that apply to you.

SECTION 2 – PREPARING TO INSTALL

ITEMS INCLUDED IN PURCHASE:

1. 16/6 Survival Radio with lithium battery, wrist lanyard and radio cover
2. Warranty card
3. Commercial Registration Advisory
4. Product Support Manual

If any of the above is missing, please contact ACR Electronics' Technical Service by email at service@acrelectronics,com or by phone at +1 (954) 981- 3333.

Figure 1-
ACR 16/6 Survival Craft Portable Two-Way Radiotelephone

ANATOMY OF THE SR-102™ Radio

The key components of the SR-102™ Radio are:

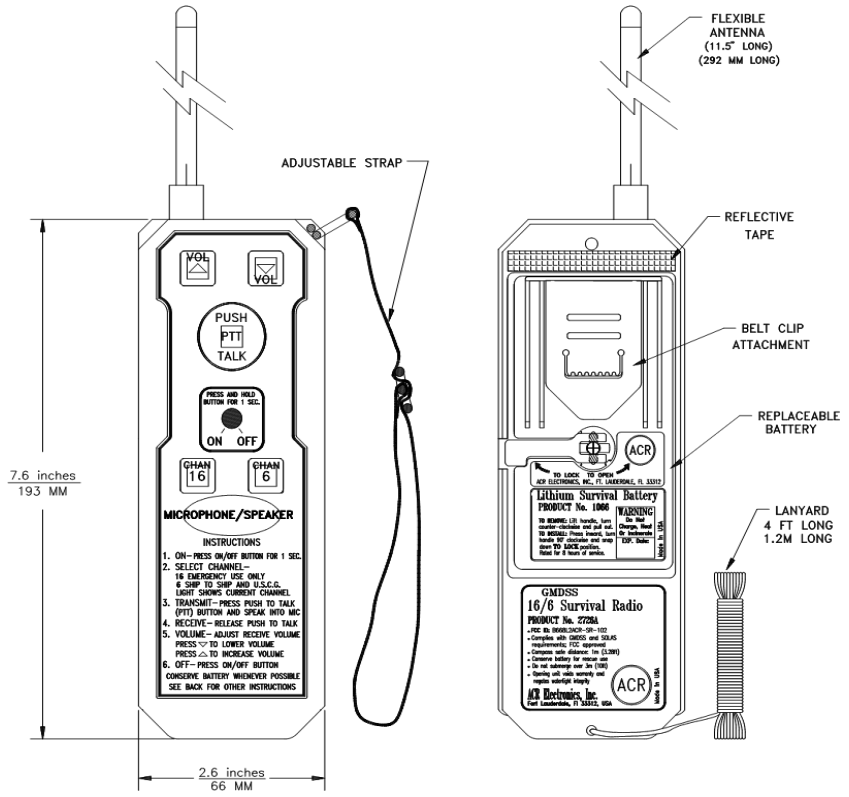

Figure 2-

SR-102™ Main Features

SECTION 3 – INSTALLING THE SR-102™ SURVIVAL RADIO

The Survival Radio and its protective cover shall be packed with the ship's survival craft or in a survival suit. When not packed with a life raft, the radiotelephone should be stored in an accessible place, as close to the survival craft as possible.

SECTION 4 – OPERATING THE SR-102™ SURVIVAL RADIO

All radio controls are flat-panel, push-types located on the front surface of the radio.

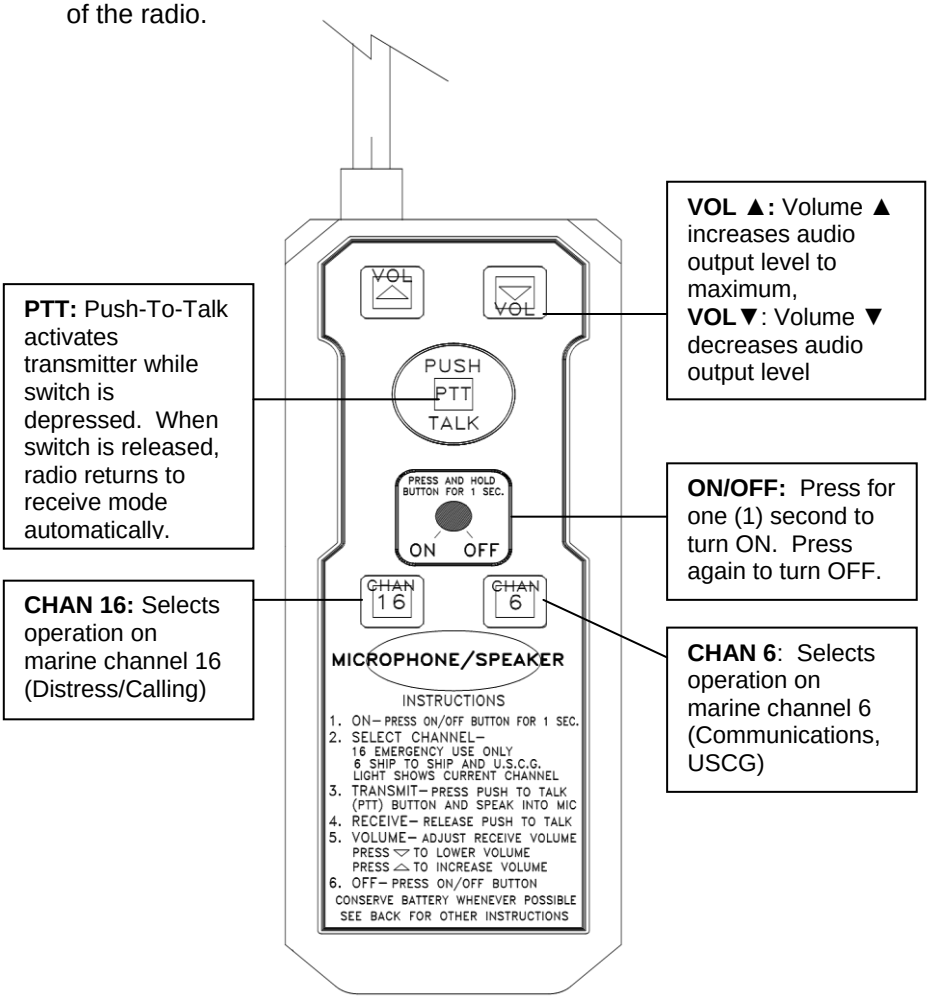
PTT: Push-To-Talk activates transmitter while switch is depressed. When switch is released, radio returns to receive mode automaticallv.
CHAN 16: Selects operation on marine channel 16 (Distress/Calling)
VOL ▲: Volume ▲ increases audio output level to maximum,
VOL▼: Volume ▼ decreases audio output level
ON/OFF: Press for one (1) second to turn ON. Press again to turn OFF.
CHAN 6: Selects operation on marine channel 6 (Communications, USCG)
VOL
VOL
PUSH
PTT
TALK
PRESS AND HOLD BUTTON FOR 1 SEC.
ON OFF
CHAN 16
CHAN 6
MICROPHONE/SPEAKER
INSTRUCTIONS
1. ON– PRESS ON/OFF BUTTON FOR 1 SEC.
2. SELECT CHANNEL–
16 EMERGENCY USE ONLY
6 SHIP TO SHIP AND U.S.C.G.
LIGHT SHOWS CURRENT CHANNEL
3. TRANSMIT– PRESS PUSH TO TALK (PTT) BUTTON AND SPEAK INTO MIC
4. RECEIVE– RELEASE PUSH TO TALK
5. VOLUME– ADJUST RECEIVE VOLUME
PRESS ▽ TO LOWER VOLUME
PRESS △ TO INCREASE VOLUME
6. OFF– PRESS ON/OFF BUTTON
CONSERVE BATTERY WHENEVER POSSIBLE
SEE BACK FOR OTHER INSTRUCTIONS

Figure 3- Control Panel

OPERATING INDICATORS

CHAN 16	The push switch includes a **RED** light which will be illuminated when the radio is ON and Channel 16 is selected.
CHAN 6	The push switch includes a **GREEN** light which will be illuminated when the radio is ON and Channel 6 is selected.
VOL ▲ ▼	Both of these push switches light up **YELLOW** when the **PTT** switch is depressed - indicates that radio is transmitting.
PTT	The push switch blinks **YELLOW** at a slow rate to assist operator in locating the PTT switch in darkness.

CHANNEL 16 OPERATION (CHAN 16)

1. Remove control panel protective cover.
2. Strap the unit around operator's wrist, hand or glove.
3. Press ON/OFF button for one (1) second to turn ON the Survival Radio.
4. CHAN 16 button stays lit (red).
5. Listen for the tone and for the squelch action 3 seconds after activating the unit.
6. Press blinking PUSH TO TALK button to transmit.
7. Speak loudly and clearly into speaker area from a distance of approximately 3"to 6" (7.5 cm to 15 cm).
8. Both Volume indicators stay lit during transmission.
9. Release PUSH TO TALK button to listen.
10. Adjust Volume by pressing the respective buttons (Note: there are 4 preset volume settings from which to choose).
11. Keep transmissions to a minimum to conserve battery power.
12. Periodically verify that the CHAN 16 button is lit (red) to guard against accidental selection of channel 6.
13. Press ON/OFF button to turn unit off.

CHANNEL 6 OPERATION (CHAN 6)

1. Remove control panel protective cover.
2. Strap the unit around operator's wrist, hand or glove.
3. Press ON/OFF button for one (1) second to turn on the Survival Radio.
4. CHAN 16 button stays lit (red).

5. Listen for the tone and for the squelch action 3 seconds after activating the unit.
6. Press CHAN 6 button to select channel 6.
7. CHAN 6 button stays lit (green).
8. Adjust Volume by pressing the respective buttons (Note: there are 4 preset volume settings from which to choose).
9. Press blinking PUSH TO TALK button to transmit.
10. Speak loudly and clearly into speaker area from a distance of approximately 3"—6" (7.5 cm to 15 cm).
11. Both Volume indicators stay lit during transmission.
12. Release PUSH TO TALK button to listen.
13. Keep transmissions to a minimum to conserve battery power.
14. Press ON/OFF button to turn unit off.

***NOTE:** ON/OFF button is designed with a short delay to prevent accidental turn-on.

BATTERY SAVE FEATURE

To conserve battery life, the unit will automatically shut-off following a period of approximately 20- 30 minutes of idle radio activity.

SECTION 5- SENDING DISTRESS COMMUNICATIONS

The following are a set of observations intended to help the user maximize his success during the course of a rescue where two-way communication is possible.

1. Transmit only when the channel is clear of activity, or between other stations' transmissions during a distress.

2. Use the world recognized expression M'AIDER or MAYDAY to call for help. Note that MAYDAY is commonly pronounced as it is read in English, when utilized in English speaking countries. To improve the chances of being understood internationally, it is best to pronounce the above expression two ways:

a. The internationally recognized way, *M'AIDER* (in French) pronounced phonetically as “mĕ - dĕ,” (see any French language instruction book for further details) and,

b. The commonly used pronunciation in English speaking countries MAYDAY pronounced phonetically as “mā - dā.”

To prevent the distress signal from being misunderstood, and to improve the intelligibility of the distress call, use the two pronunciations above when calling, for example (also, see example for part c):

"M'AIDER MAYDAY M'AIDER THIS IS MARY JANE WXT599 WXT599 WXT599".

3. Always use the ICAO Convention (Convention on International Civil Aviation) recognized alphabet for spelling.

ICAO recognized alphabet:

A	Alpha	N	November
B	Bravo	O	Oscar
C	Charlie	P	Papa
D	Delta	Q	Quebec
E	Echo	R	Romeo
F	Foxtrot	S	Sierra
G	Golf	T	Tango
H	Hotel	U	Uniform
I	India	V	Victor
J	Juliet	W	Whiskey
K	Kilo	X	X-ray
L	Lima	Y	Yankee
M	Mike	Z	Zulu

EXAMPLE: "M'AIDER MAYDAY M'AIDER THIS IS MARY JANE Whiskey X-ray Tango 599 Whiskey X-ray Tango 599 Whiskey X-ray Tango 599"

To acknowledge that a transmission has been received and understood in its entirety, simply use the expression "R R R" spoken as "Romeo Romeo Romeo" ("R" stands for received). Note: some radio operators use the expression "Roger" instead of "Romeo".

4. Antenna height and range of communications are intimately related. In general, a higher antenna will have a longer range than a similar lower antenna.

The typical range for a transmitting radio held at about 1.2 meters (4.0 ft) above average water level is expected to equal 4.5 kilometers (2.8 statute miles). The receiving shipborne antenna can extend the range if it is mounted high. Airborne receivers greatly extend the above range (over 150 kilometers/100 miles for aircraft flying over 1500 meters/5000 ft).

Because of the above fact, and to maximize the range of the survival craft VHF radiotelephone, the unit should be held as high as possible without endangering the safety of the operator.

SECTION 6 – MAINTAINING THE SR-102 SURVIVAL RADIO

MANDATORY TESTING

Radiotelephones operated within the U.S.A. must be operationally tested on a periodic basis (FCC regulations, Part 80, section 80.834, until superseded by section 80.1095).

To test the radiotelephone, follow the steps given below.

NOTE: This test requires that a separate VHF marine radio transceiver be used to monitor transmitted and received signals.

Any transmissions effected for the purpose of testing the Survival Radio shall be as brief as possible. The recommended test message format is as follows: "<name of station receiving the test message> THIS IS <name of station transmitting this text><station call sign or call letters>". EXAMPLE: "BLUE DUCK THIS IS MARY JANE WXT599".

When a second radiotelephone or the ship's receiver is utilized to monitor proper operation of the Survival Radio, the test distance between devices should be kept to a maximum and the following message format should be observed: "<name of station transmitting this text> THIS IS <name of station transmitting this text> MOBILE 1". EXAMPLE: "MARY JANE THIS IS MARY JANE MOBILE 1 WXT599"

NOTE: If the unit to be tested is not on board the vessel containing the fixed station, "UNIT 1" should be used rather than "MOBILE 1".

1. Remove the radio from its survival craft package.
2. Remove control panel protective cover.
3. Press and hold ON/OFF button for one (1) second.

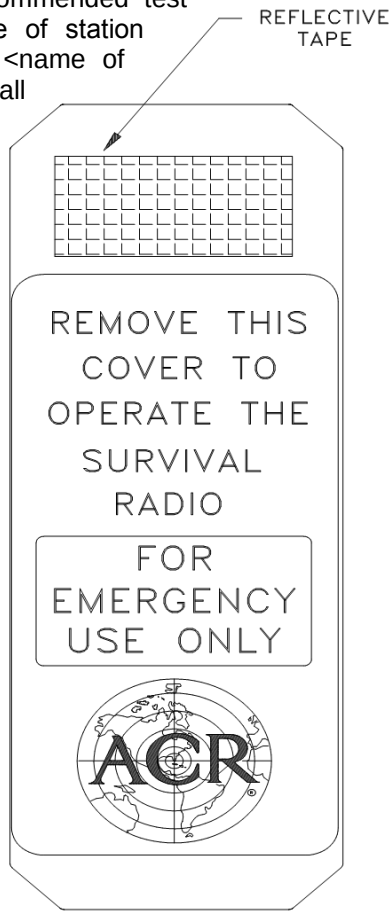

Figure 4- Protective Cover

4. Listen for the tone and for the squelch action 3 seconds after activating the unit.
5. The receiver tunes to Channel 16 automatically when unit is turned ON.
6. Listen for any activity on the frequency (channel 16).
7. If no activity is detected, transmit the test message and have someone monitor the transmission (see above for suggested test message formats).
8. If the test signal was not heard (full quieting), replace the battery and retest. If the test signal is still not heard (full quieting), have the unit inspected at your nearest authorized service center.
9. Have someone return the call from the monitoring station (lowest power setting) to verify proper radiotelephone receiver operation.
10. If a response is not heard (full quieting), have the radio unit inspected at your nearest authorized service center.
11. Press the CHAN 6 key to tune unit to channel 6.
12. Set the monitoring transceiver to channel 6 (156.3 MHz).
13. Listen for any activity on the frequency (channel 6).
14. If no activity is detected, transmit the test message and have someone monitor the transmission (see above for suggested test message formats).
15. If the test signal was not heard (full quieting), have the unit inspected at your nearest authorized service center.
16. Have someone return the call from the monitoring station (lowest power setting) to verify proper radiotelephone receiver operation.
17. If a response is not heard (full quieting), have the radio unit inspected at your nearest authorized service center.
18. Slide ON/OFF button to turn unit OFF.
19. Replace control panel protective cover.
20. Replace unit into its survival craft package.

VISUAL INSPECTION

Periodically inspect the Survival Radio for damage, cracks and front panel label wear. Wipe off any salt deposits with a damp cloth.

BATTERY INFORMATION

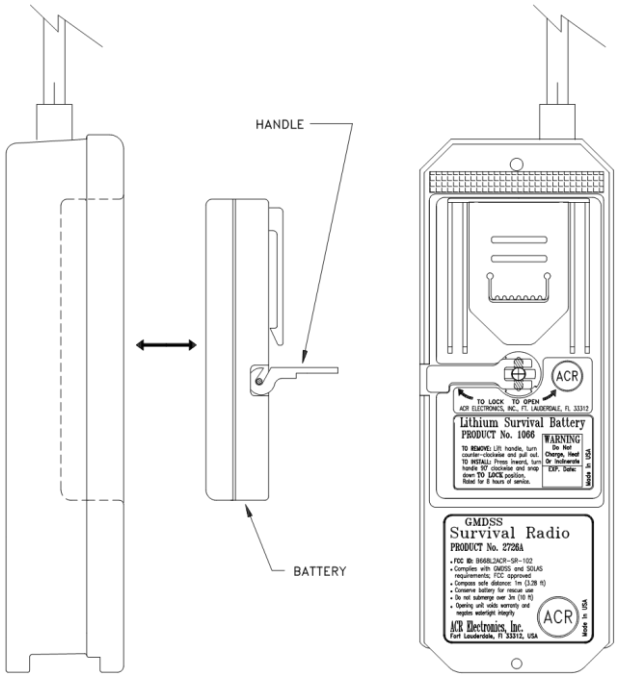

Figure 5- Battery Installation

Battery options

Lithium Survival Battery (Product No. 1066)

The Survival Radio is supplied with a replaceable lithium battery pack. This primary battery pack will operate the radio for at least 8 hours, in compliance with IMO/SOLAS and FCC requirements for a survival craft radio. To maintain compliance with these regulations, the lithium battery pack must be replaced after 5 years or after any use (with the exception of activating the unit for the purpose of testing.)

Additional lithium battery packs may be stored in survival craft along with the radio for extended operating life.

CAUTION: The battery is internally fused to avoid fire hazard. Do not immerse in water, short circuit or incinerate.

MaxCap™ Rechargeable (Ni-Cad) Battery (Product No. 1067)
To allow the survival radio to be used in non-emergency situations, a rechargeable battery pack (ACR Product No. 1067), and a MaxCap Charger (ACR Product No. 2711) are also available. The rechargeable battery pack will operate the unit for approximately four to six hours. The charger is capable of charging the battery in less than 135 minutes. Refer to charger manual for charging instructions.

CAUTION: When the radio is operating with the rechargeable battery pack, it does not comply with the SOLAS/GMDSS regulation for battery life.

How to replace the battery pack
Lift the battery handle, turn it counter-clockwise until it stops and pull the battery out. Replace a fresh battery into the rear of the radio. Turn the handle clockwise until it stops and snap it down to lock into position. Make sure battery is engaged by turning the unit ON and then OFF.

APPENDIX A – BATTERIES AND CHARGERS

ITEM	DESCRIPTION	ACR PRODUCT NUMBER
SR-102™ 16/6 Survival Radio	Radio as described in Section 2 of this manual	2726A
MaxCap™ Rechargeable Battery	Rechrgeable battery for Survival Radio	1067
Lithium Survival Battery	Lithium battery pack for Survival Radio (5-year replacement life)	1066
MaxCap™ Charger	Fast charger (<3 hours) for rechargeable MaxCap™ battery. Includes battery.	2711, 2711.1
Charger XLT	Trickle charger for rechargeable MaxCap™ battery.	2713, 2713.1

APPENDIX B – TECHNICAL SPECIFICATIONS
for SR-102™ 16/6 Survival Radio

OPERATING FREQUENCY	
Channel 16	156.800MHz, Distress Calling
Channel 6	156.300MHz, Communications/USCG
TRANSMITTER	
Power output (ERP)	500mW ± 2.5dB
Frequency control	Quartz crystal (±.001%)
Modulation type	Phase
Max. modulation	± 5kHz
Audio width	300/2500Hz
RECEIVER	
Sensitivity (12dB SINAD)	1.0 µV
Audio output	300 mW
BATTERY	
Type	Primary: lithium
Storage life	10 years
Operating life under typical duty of 1:9 (i.e., 6 sec T_X, 6 sec R_X, 48 sec stand by)	8 hours @ -20°C
SERVICE CONDITIONS	
Temperature	-20°C to +50°C
Altitude	0 to 40,000ft/ 0 to 12000m
Water resistance	3m depth, max up to 5 minutes
DIMENSIONS (less antenna)	
Height	7.6in/ 19.3cm
Width	2.6in/ 6.6cm
Thickness	1.7in/ 4.3cm
Antenna	11.5in/ 29.2cm
Weight (includes battery)	1.1lb/ 0.5kg

APPENDIX C – WARRANTY, USEFUL LIFE POLICY, NOTICES

LIMITED WARRANTY

This product is warranted against factory defects in material and workmanship for a period of 1 (one) year* from date of purchase or receipt as a gift. During the warranty period ACR Electronics, Inc. will repair or, at its option, replace the unit at no cost to you for labor, materials and return transportation from ACR. For further assistance, please contact our Technical Service Department at ACR Electronics, Inc.,5757 Ravenswood Road, Fort Lauderdale, FL 33312-6645. Email: service@acrelectronics.com, Fax: +1 (954) 983-5087, Telephone: +1 (954) 981-3333.

This warranty does not apply if the product has been damaged by accident or misuse, or as a result of service or modification performed by an unauthorized factory. Except as otherwise expressly stated in the previous paragraph, THE COMPANY MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THIS PRODUCT. The Company shall not be liable for consequential or special damages.

To place the warranty in effect, register online at www.acrelectronics.com or return the attached card within 10 days.

*Five years for the following products: EPIRB, PLB, S-VDR, SSAS.

USEFUL LIFE POLICY

The typical service life of a properly maintained Product is limited to 12 years from date of manufacture. Products that are 12 years and 1 month or older from date of manufacture will not be serviced by ACR or our Battery Replacement Centers. A Product that is 12 or less years old from date of manufacture will be serviced as long as the unit appears fit to be placed back into its final operational cycle. Service includes the replacement of those items that must be replaced at service intervals and the verification that the device appears to be in good mechanical and electrical working condition by an ACR authorized service technician.

NOTICES

ACR Electronics diligently works to provide a high quality Product Support Manual, however, despite best efforts, information is subject to change without notice, and omissions and inaccuracies are possible. ACR cannot accept liability for manual contents. To ensure that you have the most recent version of the Product Support Manual, please visit the ACR website at www.acrelectronics.com.

©2009 by ACR Electronics, Inc., part of Cobham plc. All rights reserved. Reproduction in whole or in part is permitted only with permission of ACR Electronics, Inc.

Ongoing product improvements may change product specifications without notice.

Trademarks or registered trademarks are the property of their respective owners.